



TWO-PLY WATER DISCHARGE HOSE

For medium-duty discharge of water in construction, mining, oil exploration, agriculture, equipment rental, and more. Can be crimped or banded to make assemblies per your specifications.


COVER MATERIAL	Wrapped EPDM blend	REINFORCEMENT	Two-ply, high-tensile fiber cord plies
TUBE MATERIAL	EPDM or EPDM blend	TEMPERATURE RANGE	-40° F to 185° F

I.D.	O.D.	REIN. PLIES	MAX. W.P. AT 68°F	MIN. BEND RADIUS	WEIGHT
1 1/2 in	1.81 in	2	150 psi	15.00 in	0.60 lb/ft
2 in	2.31 in	2	150 psi	20.00 in	0.84 lb/ft
2 1/2 in	2.75 in	2	150 psi	25.00 in	0.91 lb/ft
3 in	3.38 in	2	150 psi	30.00 in	1.12 lb/ft
4 in	4.37 in	2	150 psi	40.00 in	1.25 lb/ft
5 in	5.51 in	2	150 psi	50.00 in	2.29 lb/ft
6 in	6.50 in	2	150 psi	60.00 in	3.45 lb/ft
8 in	8.50 in	2	100 psi	80.00 in	4.30 lb/ft
10 in	10.50 in	2	100 psi	100.00 in	5.40 lb/ft
12 in	12.50 in	2	100 psi	120.00 in	6.75 lb/ft

INDUSTRY INTERCHANGE: WD-150, Plicord, Day-Flo 7306, Steelhead, Leader

FOUR-PLY WATER DISCHARGE HOSE

For heavy-duty discharge of water in construction, mining, oil exploration, agriculture, equipment rental, in-plant service and more. Can be crimped or banded to make assemblies per your specifications.

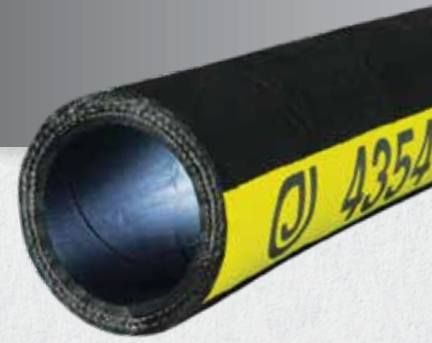

COVER MATERIAL	Wrapped EPDM blend	REINFORCEMENT	Four-ply, high-tensile fiber cord plies
TUBE MATERIAL	EPDM or EPDM blend	TEMPERATURE RANGE	-40° F to 185° F

I.D.	O.D.	REIN. PLYS	MAX. W.P. AT 68°F	MIN. BEND RADIUS	WEIGHT
1 1/2 in	2.00 in	4	250 psi	15.00 in	0.83 lb/ft
2 in	2.56 in	4	250 psi	20.00 in	1.11 lb/ft
2 1/2 in	3.07 in	4	250 psi	25.00 in	1.24 lb/ft
3 in	3.58 in	4	225 psi	30.00 in	1.50 lb/ft
4 in	4.61 in	4	200 psi	40.00 in	1.85 lb/ft
6 in	6.57 in	4	150 psi	60.00 in	3.90 lb/ft
8 in	8.66 in	4	125 psi	80.00 in	5.25 lb/ft
10 in	10.66 in	4	125 psi	100.00 in	6.29 lb/ft
12 in	12.68 in	4	125 psi	120.00 in	7.83 lb/ft

INDUSTRY INTERCHANGE: Plicord HD, SS110

* RAGCO supports the autonomy of its locations to select the best products to service their markets. Subtle variations of these specifications may exist. Contact your RAGCO affiliate for confirmation.