


SYTLE 344FDA

Braided from continuous 100% Teflon Fiber that satisfies all FDA requirements. For all applications in the food processing industry or anywhere FDA material is required in pumps or valves. Style 344FDA is in full compliance with the FDA and USDA requirements under Title 21 Food and Drugs, 178.3570, Lubricants with Incidental Food Contact, and 177.1550, Perfluorocarbon Resins. Style 344FDA contains only material permitted for food contact use by the U.S. Department of Agriculture and the Food and Drug Administration.

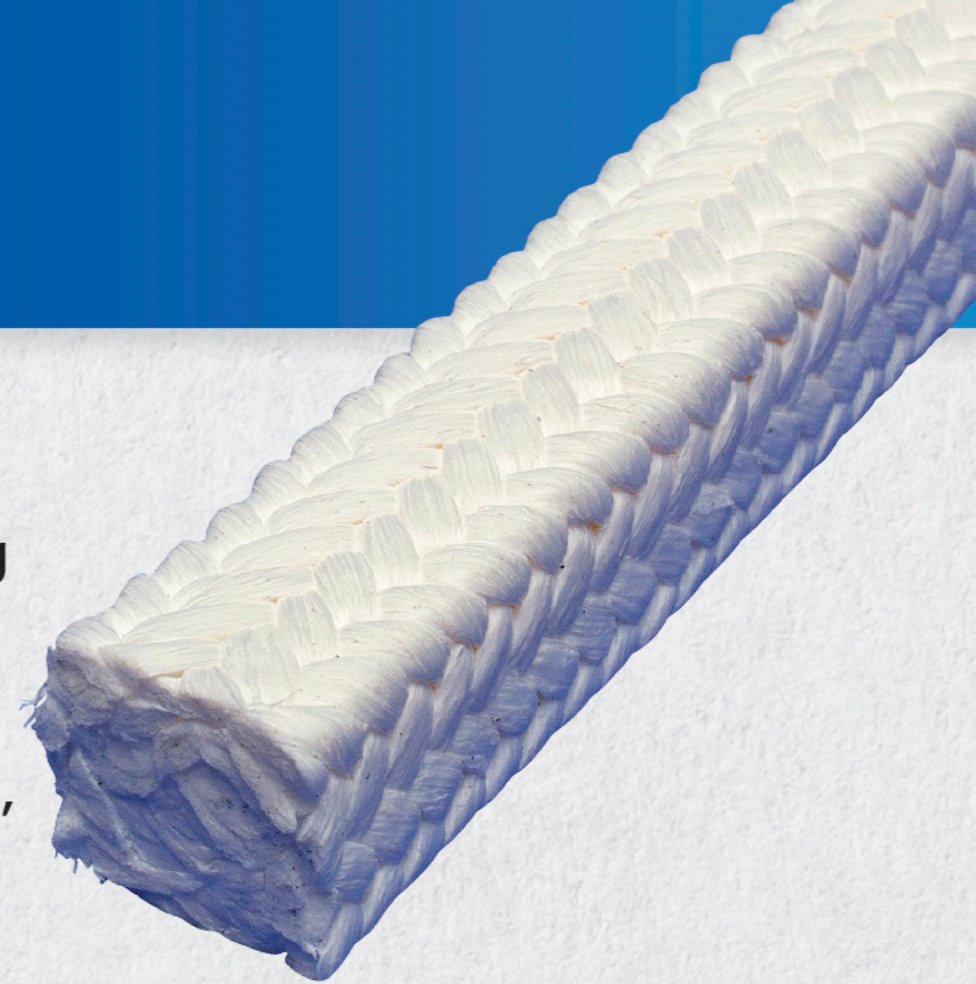

CONSTRUCTION	Interlock Braid	SHAFT SPEED RAFTING	1500 FPM / 8 MPS
TEMPERATURE RATING	500°F / 260°C	PRESSURE RATING	300 PSI / 20 BAR
PH RATING	0 – 14	INDUSTRY CROSSOVER	154FDA, 1725, C1056, 5904, ML2236, 2006FDA, 245