


CORRUGATED PVC SUCTION HOSE

HEAVY DUTY

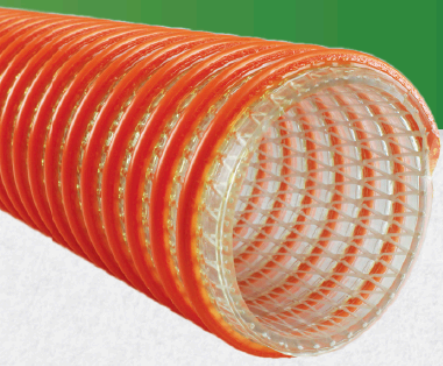

Heavy-duty suction and discharge hose for use in a variety of industries, such as rental pumping equipment and applications where the hose needs to slide easily, or visual confirmation of material flow is necessary.

TUBE AND COVER	Clear, flexible PVC with synthetic yarn braiding	REINFORCEMENT	Orange, rigid PVC helix
SAFETY FACTOR	3:1	TEMPERATURE	-4°F to +150°F

I.D.	O.D.	RECOM. REC W.P. @ 72° F (PSI)	APPROX BURST PRESSURE @ 72° F (PSI)	VACUUM RATING @ 72° F (IN/HG)	REC MIN BEND RADIUS @ 72° F (INCH)	APPROX WEIGHT (LBS/FT)
1"	1.38"	100	400	28	3	0.27
1 1/4"	1.66"	100	400	28	3	0.33
1 1/2"	1.89"	100	280	28	4	0.36
2"	2.45"	100	280	28	5	0.54
3"	3.61"	100	280	28	7	1.07
4"	4.73"	75	200	28	8	1.74
6"	7.13"	70	180	28	12	3.81
8"	9.3"	50	150	28	30	5
10"	11.5"	35	105	28	44	7.48
12"	13.77"	30	100	25	80	11.25