


# RUBBER WATER-SUCTION HOSE

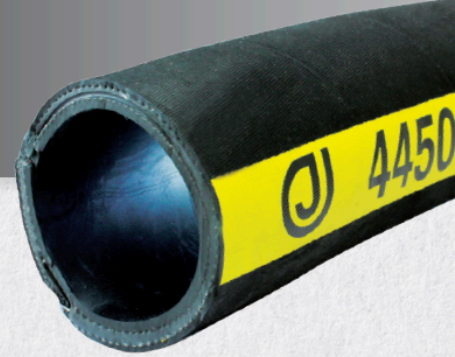

A flexible and economical hose for suction, discharge, or gravity flow of water in construction, mining, oil exploration, agriculture and equipment rental. Resistant to water-based AG fertilizers and salt water. Cover is abrasion- and weather-resistant.

<b>CONSTRUCTION</b>	Tube is EPDM blend, smooth and black	<b>TEMPERATURE</b>	-25°F (-32°C) to +185°F (+85°C)
<b>COVER</b>	EPDM blend with a fabric impression	<b>REINFORCEMENT</b>	2-ply or 4-ply synthetic fabric with a double wire helix

ID	OD	WP (PSI)	VACUUM (HG)	MIN BEND RADIUS	WEIGHT/FT (LBS)
1"	1.42"	150	Full	3.75"	0.5
1-1/4"	1.7"	150	Full	6"	0.75
1-1/2"	1.96"	150	Full	6.5"	0.8
2"	2.49"	150	Full	8"	1.11
2-1/2"	2.99"	150	Full	10"	1.75
3"	3.5"	150	Full	12"	2.24
4"	4.53"	150	Full	18"	2.79
5"	5.68"	150	Full	26"	3.25
6"	6.54"	150	Full	31"	5.75
8"	8.79"	150	Full	42"	6.59
10"	10.91"	75	Full	50"	10.25
12"	12.91"	75	25	60"	13.5
14"	15.13"	75	25	72"	16.75

**INDUSTRY INTERCHANGE:** Transporter, Con-Ag, Day-Flo 7257, Barracuda, Otter

\* RAGCO supports the autonomy of its locations to select the best products to service their markets. Subtle variations of these specifications may exist. Contact your RAGCO affiliate for confirmation.